


4. SLABS

Screed Roof wood fiber on concrete slab

Complete dry system for screed with Fibertherm Roof wood fiber panels density 200 kg/m³ on concrete foundations

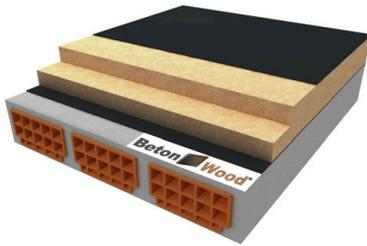

Complete dry system for screed with Fibertherm Roof wood fiber panels density 200 kg/m³ on concrete foundations.
Excellent construction system for high insulating dry slabs for attics.

STRATIGRAPHY	DESCRIPTION	QUANTITY m ²	PRICE €/m ²	AMOUNT	
1 Anti-steam barrier FiberTherm multi UDB	High airtight sealant vapor barrier for renovation solutions. Extreme ease of installation for safe and simple use. It has an integrated adhesive strip to secure joints and can be used as a temporary cover. Size: 1,50 m x 50 m Roll surface: 75m ² Weight approx.160 g/m ²			0	
2 Wood fiber Fibertherm roof 200 (2 layers)	The FiberTherm Roof panel in wood fiber is a rigid insulation characterized by a high compressive strength, ideal for completely natural insulating ceilings, attics and roofs, ensuring the creation of environments with a high living comfort as well as a truly healthy indoor atmosphere. The panel is free of any type of toxic substance, it is also recyclable and made exclusively with wood from controlled forests in compliance with the FSC guidelines. It is produced with a wet system, according to EN 13171 and EN 13986 standards under constant quality control and is characterized by the following thermodynamic characteristics: density approx. 200 Kg/m ³ , thermal conductivity coefficient λ=0,042 W/mK, specific heat c=2100 J/Kg K, coefficient of resistance to vapor penetration μ=5 and fire reaction class E, according to the standard EN 13501-1.			0	
3 Anti-steam barrier FiberTherm multi UDB	High airtight sealant vapor barrier for renovation solutions. Extreme ease of installation for safe and simple use. It has an integrated adhesive strip to secure joints and can be used as a temporary cover. Size: 1,50 m x 50 m Roll surface: 75m ² Weight approx.160 g/m ²			0	
4 Foundation	Concrete foundation				
		TAX IVA 22%	0	TAXABLE	0
				TOTAL AMOUNT	0
	The functionality of the system will be covered by a BetonWood guarantee for the characteristics of air tightness, water proofing and isolation of the technological package. The warranty will be documented with the appropriate Certificate and Certificate of Assurance that will be delivered at the end of the work to the DD.LL. from the same layer. The forms are available on the BetonWood website as well as the technical indications, the application matrix and the exclusion clauses.				